


PRODUCT CHART

Effective: February 2024

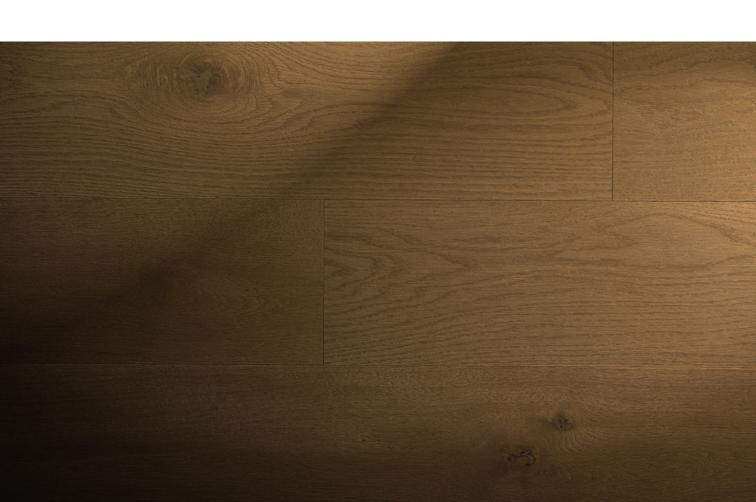

MERCIER 2024 Product Chart

SB Select & Better
DS Distinction
AT Authentic
RO Rift & Quarter Sawn
PRO PRO









Sc	OUTCE		-						
		SYNERGY (SN)	BALANCE (BA)	COMFORT (CF)		ANCE Ba)	SYNERGY (SN)	BALANCE (BA)	COMFORT (CF)
			RED OAK		WHIT	TE ASH		WHITE OAK	
	tforms mensions	Grades		Glosses	Grades	Glosses	Grades Glosses		Glosses
COLID	3 1/4" (3/4")	DS		MO	05	W D	43		MO
SOLID	4 1/4" (3/4")	05		MO	05	W D	4		MO
	5" (½")	DS		MO	03	M D	(A)		MO
	5" (¾")	DS		MO	OS	M I	(A)		M O
ENGINEERED	6 ½" (½")	AT		MO	AT .	M I	(A)		MO
	6 ½" (¾")	AT		MI	AT .	M I	A		MO
	8 1/8" (3/4")	AT		MI			A		MO
HERRINGBONE	5" x 18" (½")	DS		MO			DS		MO



Naked			2))			TV.					2		
			KED NK)		KED IK)	1	KED IK)	1	KED IK)		KED NK)	NAKED (NK) AMERICAN WALNUT	
		WHIT	TE ASH	HARD	MAPLE	HIC	KORY	REC	OAK	WHIT	TE OAK		
	atforms imensions	Grades	Glosses	Grades	Glosses	Grade	Glosses	Grades	Glosses	Grades	Glosses	Grade	Gloss
COLID	3 1/4" (3/4")	OS	MBI	DS	MO	AT)	MO	03	MBI	Aī	MBO		
SOLID	4 1/4" (3/4")	03	MBI	DS	MO	AT)	MO	OS	MBO	AT	MBO		
	5" (½")	OS	MBI	DS	MO	AT	MO	DS	MBI	AT)	MBO		
	5" (¾")	DS	M B D	DS	MO	AT)	MO	03	MBI	AT)	MBO		
ENGINEERED	6 ½" (½")	AT	M B D	AT	MO	AT	MO	AT)	MBI	AT RQ	MBO	AT	M
	6 ½" (¾")	AT	M B D	AT	MO	AT	MO	AT	MBI	AT RQ	MBO	AT	M
	8 1/8" (3/4")			AT	MO			AT	MBI	AT	MBO		
HERRINGBONE	5" x 18" (½")			DS	MO			DS	MBI	DS	MBO		



Ele,	gancia	CHARD	ENGLICH		MADERA	FUECO	FILEO	ROMA	SHEDE	PALOMINO	PROOKLINE	FACILITY	FUECO	ACODAL PROWAL	MODERN	CONCRETE
	SILVER ENGLISH SANDSTO GREY (SY) TEA (ET) (SD) WHITE ASH				MADERA (MD)	FUEGO (FU)	FUEGO (FU)	(RA)	SUEDE (SU)	PALOMINO (PO)	BROOKLINE (86)	ENGLISH TEA (ET)	FUEGO (FU)	ACORN BROWN (82)	MODERN GREY (MG)	GREY (83)
			·	WHI							YELLOW BIRCH					
	atforms dimensions	Grades		Glosses	Grades	Glosses	Grade	Glosses	Grade	Gloss	Grade Glosses			Glosses		
COLID	3 1/4" (3/4")	OS		SMBI	AT	SMBO	AT	SMI	DS	M		DS			SM	
SOLID	4 1/4" (3/4")	DS		S M B D	AT	SMBO	AT	SMO	DS	M		DS		SM		
	5" (1/2")	OS		S M B D	AT	SMBO	AT)	SMI								
	5" (¾")	DS		S M B I	AT	SMBO	AT	SMO								
ENGINEERED	6 ½" (½")	AT		S M B []	AT	SMBO	A	SMO								
	6 ½" (¾")	A		S M B D	AT	SMBD	AT)	SMI								
	8 1/8" (3/4")				AT	SMBD										
HERRINGBONE	5" x 18" (½")				03	SMBO										

Element		ELEMENT (EL)	TERRAIN (TR)	ELEMENT (EL)		
		HARD I	MAPLE	нісн	ORY	
Platforms and dimensions		Grades	Gloss	Grade	Gloss	
COLID	3 1/4" (3/4")	03	M	AT)	M	
SOLID	4 1/4" (3/4")	03	M	AT .	M	
	5" (½")	03	M	AT	M	
	5" (¾")	DS	M	AT	M	
ENGINEERED	6 ½" (½")	AT	M	AT	M	
	6 ½" (¾")	AT	M	AT	M	
	8 1/8" (3/4")	AT	M			
HERRINGBONE	5" x 18" (½")	DS	M			

		HARD MAPLE RED OAK		A. S.						N. N.	
		NATURAL (00)	LINEN (HH)	KEYSTONE (GL)	MOCCASIN (80)	BROOKLINE (86)	CONCRETE GREY (83)	ACORN BROWN (82)	GUNSTOCK (12)	CARBON (84)	GRIZZLY (85)
				·							
				RED OAK					HARD MAPLE		
	atforms limensions	Grade		RED OAK	Glosses		Gra	ade	HARD MAPLE	Gloss	
and o		Grade	,	RED OAK	Glosses			ade	HARD MAPLE	Gloss	
	limensions			RED OAK			•		HARD MAPLE	_	

Herringbo	ne		
	HARD MAPLE	RED OAK	WHITE OAK
Boards dimensions		RED OAK one sections shown on the collections below for available co	

Platform suitable only for a Herringbone pattern installation.







Solid or Engineered: Take your pick!

	SOLID (SOLID WOOD)	ENGINEERED (ENGINEERED WOOD)
NATURE OF MATERIAL	100% HARDWOOD	TOP LAYER: HARDWOOD BASE: PLYWOOD
SPECIAL FEATURES OF MATERIAL	100% SOLID WOOD NATURAL CHARM	UNBEATABLE STABILITY SUITABLE FOR ALL SURFACES
TYPES OF INSTALLATIONS	NAILED AND STAPLED	NAILED, GLUED, STAPLED*, AND FLOATING
INSTALLATION IN THE BASEMENT OR ON CONCRETE	NOT RECOMMENDED	POSSIBLE
SANDING	YES: FROM 3 TO 5 TIMES	YES: FROM 3 TO 5 TIMES
SPECIES	HARD MAPLE HICKORY RED OAK WHITE ASH WHITE OAK YELLOW BIRCH	AMERICAN WALNUT HARD MAPLE HICKORY RED OAK WHITE ASH WHITE OAK
GRADE (ACCORDING TO THE SPECIES)	SELECT & BETTER, DISTINCTION, PRO, AUTHENTIC	SELECT & BETTER, DISTINCTION, PRO, AUTHENTIC, R&Q
THICKNESS AND WIDTH (ACCORDING TO THE SPECIES)	2 ¼" (57 MM) X ¾" (19 MM) 3 ¼" (83 MM) X ¾" (19 MM) 4 ¼" (108 MM) X ¾" (19 MM)	5" (127 MM) X ½" (12,7 MM) 5" (127 MM) X ¾" (19 MM) 6 ½" (165 MM) X ½" (12,7 MM) 6 ½" (165 MM) X ¾" (19 MM) 7 ½" (190,5 MM) X ½" (12,7 MM) 7 ½" (190,5 MM) X ¾" (19 MM) 8 ½" (206 MM) X ¾" (19 MM)
LENGTH	RANDOM	RANDOM
HERRINGBONE AVAILABILITY (Suitable for a Herringbone pattern installation only)	NOT AVAILABLE	5" (127 MM) X ½" (12,7 MM) FIXED LENGTHS: 18" (45,7 CM) HARD MAPLE RED OAK WHITE OAK

^{*} REFER TO TECHNICAL BULLETIN # 9

It's all about the finish.



MERCIER GENERATIONS

Our standard high performance protection. An exceptionally smooth and clear high-resistance finish that brings out the full richness of the wood. Optimal adherence for ultra-durable results. A finish you can trust.



NEW AND IMPROVED

GENERATIONS INTACT 2500

A tough, clear finish formulated for ultimate protection. The Generations Intact 2500 finish has an outstanding track record for durability in commercial applications and high traffic environments. This exceptionally durable and clear matte finish keeps floors looking great through years of wear and tear. Great for young families and pet owners.

Generations of ingenuity and performance

FEATURES	MERCIER GENERATIONS	GENERATIONS INTACT 2500
DURABILITY	Resistance to wear and tear	Superior resistance to wear and tear Microfragmented aluminum particles create a multipoint contact surface that provides increased scratch through resistance and retains the floor's original luster for longer.
DEGREE OF RESISTANCE The TABER test involves mounting a portion of a finished board onto a turntable fitted with sheets of abrasive paper. The degree of resistance is evaluated based on the number of rotations it takes to completely wear down the finish. The higher the number of cycles, the more resistant the finish.	1,000 cycles Compared to 500 cycles from the competition	2,500 cycles Compared to 1,500 cycles from the competition
ANTI-PERFORATION	Perforation-resistant	Anti-perforation
FLEXIBILITY	Flexible	Highly flexible
WATER RESISTANCE	Water resistant	Repels water The molecule adhesion between the finish and the surface of the wood creates a barrier that repels water and other liquids in the event of spills. This permanent bond prevents the finish from peeling.
ANTIMICROBIAL TREATMENT The antimicrobial contained in our finishes helps reduce the risk of spreading bacteria and mildew. Completely non-toxic, this special treatment adds an additional level of protection for healthier floors.	•	•
NON-YELLOWING Our non-yellowing process consists of 2 different UV screens that protect the original color of the floor from various light sources that could alter it: • A UV screen against yellowing of the finish when exposed to natural or artificial lighting • A UV screen to create a protective barrier that delays the yellowing of the natural wood and reduces the intensity of the color change when the latter occurs	•	•
HYPOALLERGENIC	•	•
STAIN RESISTANT	•	•
GREENGUARD CERTIFIED	•	•
CONTAINS PLANT-BASED OIL	•	•
WARRANTY Quite simply the best warranties in the industry	35 years for residential applications 5 years for light commercial applications 20 years for residential applications, PRO Collection	50 years for residential applications 3 years for commercial applications with direct outdoor access 10 years for light commercial applications

^{*}Minimum quantities and upcharges apply. Please refer to the current Mercier Price List for more details.



Mercier Generations and Generations Intact 2500 finishes meet the Greenguard Gold environmental certification standards. They are free from harmful chemical substances, emit no VOC emissions that are dangerous to human health, and help reduce the propagation of bacterial, germs and molds to keep any environment healthy.

Packaging features

				BOXES		
E	Board width	Content (sq. ft.)	Width (in)	Length (in)	Height (in)	Weight (lb)
	2 1/4" (3/4")	20 sq. ft.	9 1/4"	84"	3 1/4"	57 lb
SOLID	3 1/4" (3/4")	22 sq. ft.	10"	87"	3 1/4"	60 lb
	4 1/4" (3/4")	19 sq. ft.	9 1/4"	84"	3 1/4"	55 lb
	5" (½")	33 sq. ft.	10"	87"	3 1/4"	62 lb
	5" (¾")	22 sq. ft.	10"	87"	3 1/4"	62 ½ lb
	6 ½" (½")	33 sq. ft.	6 3/4"	88"	4 1/2"	66 lb
ENGINEERED	6 ½" (¾")	22 sq. ft.	6 3/4"	88"	4 1/2"	64 lb
	7 ½" (½")	35.16 sq. ft.	8 1/4"	79"	5"	59 lb
	7 ½" (¾")	23.44 sq. ft.	8 1/4"	79"	5"	59 lb
	8 1/8" (3/4")	18 sq. ft.	8 1/2"	88"	3 1/4"	53 lb
HERRINGBONE	5" x 18" (½")	25 sq. ft.	10"	87"	3 1/4"	47 lb

				P/	ALLETS		
Вс	oard width	Number of boxes	Content (sq. ft.)	Width (in)	Length (in)	Height (in)	Weight (lb)
	2 1/4" (3/4")	40	800 sq. ft.	38"	84"	36"	2 200 to 2 500 lb
SOLID	3 1/4" (3/4")	40	880 sq. ft.	42"	87"	36"	2 200 to 3 000 lb
	4 1/4" (3/4")	40	760 sq. ft.	38"	84"	36"	2 200 to 2 500 lb
	5" (½")	40	1 320 sq. ft.	42"	87"	36"	2 700 to 3 000 lb
	5" (¾")	40	880 sq. ft.	42"	87"	36"	2 700 to 3 000 lb
	6 ½" (½")	42	1 386 sq. ft.	42"	88"	37"	2 400 to 2 800 lb
ENGINEERED	6 ½" (¾")	42	924 sq. ft.	42"	88"	37"	2 500 to 2 700 lb
	7 ½" (½")	35	1230,6 sq. ft.	42"	79"	38"	2 000 to 2 100 lb
	7 ½" (¾")	35	820.4 sq. ft.	42"	79"	38"	2 000 to 2 100 lb
	8 1/8" (3/4")	50	900 sq. ft.	44"	88"	36"	2 300 to 2 500 lb
HERRINGBONE	5" x 18" (½")	40	1 000 sq. ft.	42"	87"	36"	1 900 to 2 500 lb

Important notice: The information contained in this document was accurate at the time of printing. Mercier Wood Flooring Inc. reserves the right to change products and product characteristics at any time without notice.

